



## CHARGING

## EDGE PINNING

## PREVENTING SIDE MOVEMENT OF MATERIAL

If there is lateral movement of a web this can lead to an unacceptable finished reel – where the edges are not together. Such reels will not be acceptable to customers and they may need to be rewound or more trim removed because of damage.

### Web Wander on Winder

The same system is used on the delivery end of film. Lateral movement of the film results in bad, untidy reels. The 7160 Bars pin the edge of the film to the last steel cylinder to prevent lateral movement. It is important that this cylinder has conductive bearings and is connected to earth.


### RELATED PRODUCTS



IONFIX Compact Static Generator



7160 Static Generator Bar

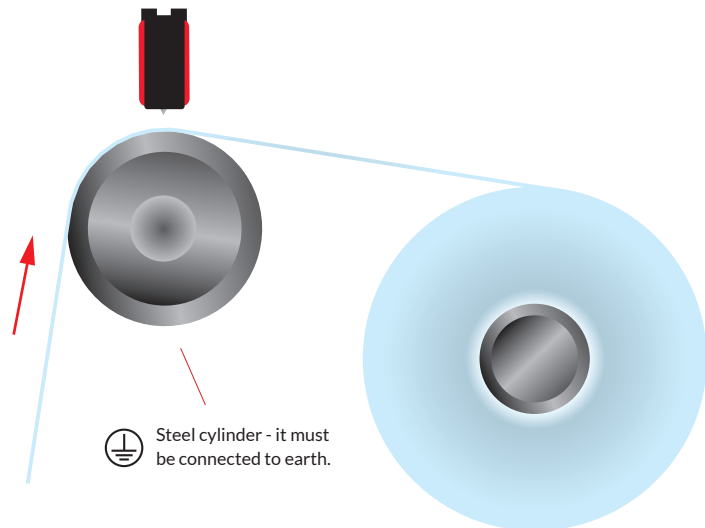

7160 Static Generator Bars, 150mm long. Positioned at each edge of the film at a distance of approximately 20mm from the film.

